
INFORMACIÓN TÉCNICA

11024CAE

5 años de garantía

La micro barra Reflex de 24” utiliza LED de alta intensidad para maximizar la salida de luz. Base de policarbonato y lente de perfil bajo. Uso recomendable para señalización de advertencia en camiones, tracto camiones, grúas, entre otros.



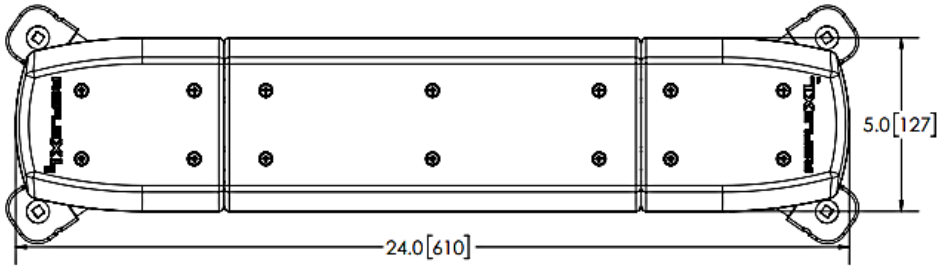


Unidad: pulgadas (mm)

Especificaciones Técnicas

Voltaje:	12-24 VCD
IP:	69K
Amps:	2.24
Leds:	72 Leds
Color:	Ámbar
Patrones:	35 patrones de flasheo
Temperatura:	-40°C / + 85°C
Certificaciones:	SAE CLASE I , CA T13 , CE , UKCA , R10 , R65 , CISPR 25, ROHS

INFORMACIÓN TÉCNICA

11024CAE

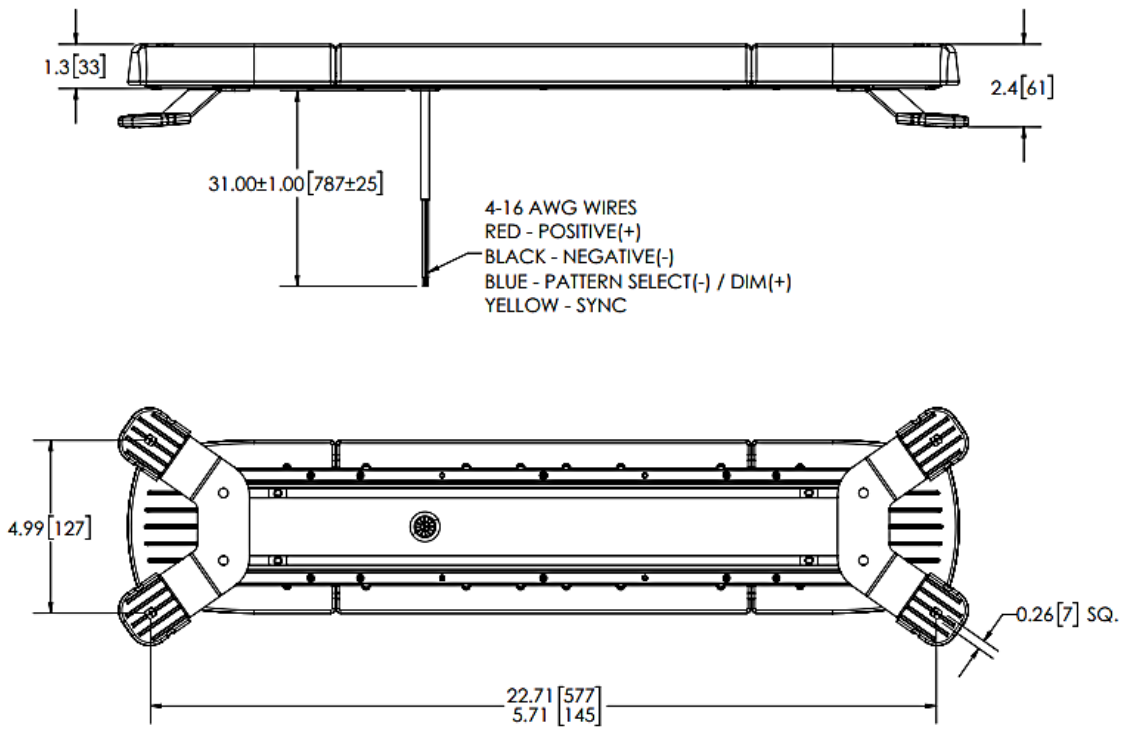

Unidad: pulgadas (mm)

SPECIFICATIONS

1. CERTIFICATIONS: CE; ECE R10; AMECA/SAE J845 (FEB 2019) CLASS 1A; YELLOW; CA Title 13 CLASS E; ; Reg 65 CertE6 TA1 000428; IP69K
   Note: Unique components, accessories, and hardware kits are not typically Included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
2. FLASH MODE: SINGLE : 75 ± 5 FLASHES PER MINUTE
   SINGLE : 120 ± 5 FLASHES PER MINUTE
   DOUBLE : 75 ± 5 FLASHES PER MINUTE
3. VOLTAGE (NOMINAL): 12-24 VDC
4. VOLTAGE (EXTREME): 9.0-32 VDC
5. CURRENT (PEAK): 6.2A (@ 12 VDC NOMINAL)
6. POWER (MAXIMUM): 79.4W (@ 12 VDC NOMINAL)
7. TEMPERATURE RANGE: -40°F (-40°C) TO 185°F (85°C)
8. CONNECTION: 4 - 16 AWG CONDUCTOR CABLE
9. MOUNTING: 4 BOLT THROUGH MOUNTING KIT
10. BASE MATERIAL: ALUMINUM
11. LENS MATERIAL: POLYCARBONATE
12. PRODUCT WEIGHT: 3.6 LBS (1.62 Kg)