INFORMACIÓN TÉCNICA

11048CACE




5 años de garantía

Serie 11 RefleXL es la barra de luces de advertencia más compacta de ECOO. Lente de policarbonato y marco de aluminio; torreta de 48” dual color ámbar-blanco. Recomendado para grúas, camiones de trabajo o vehículos utilitarios donde la advertencia compacta sea esencial.

Especificaciones Técnicas	
Voltaje:	12-24 VCD
Amps:	3.3
IP:	69K
Leds:	240 Leds
Patrones:	91 Patrones de flasheo
Color:	LED (ámbar-blanco) – Mica (Clara)
Temperatura:	-40°C / + 85°C
Certificaciones:	SAE CLASS I, CA, T13, CE, UKCA, R10, R65, CISPR25, IP69K , ROHS

INFORMACIÓN TÉCNICA

11048CACE

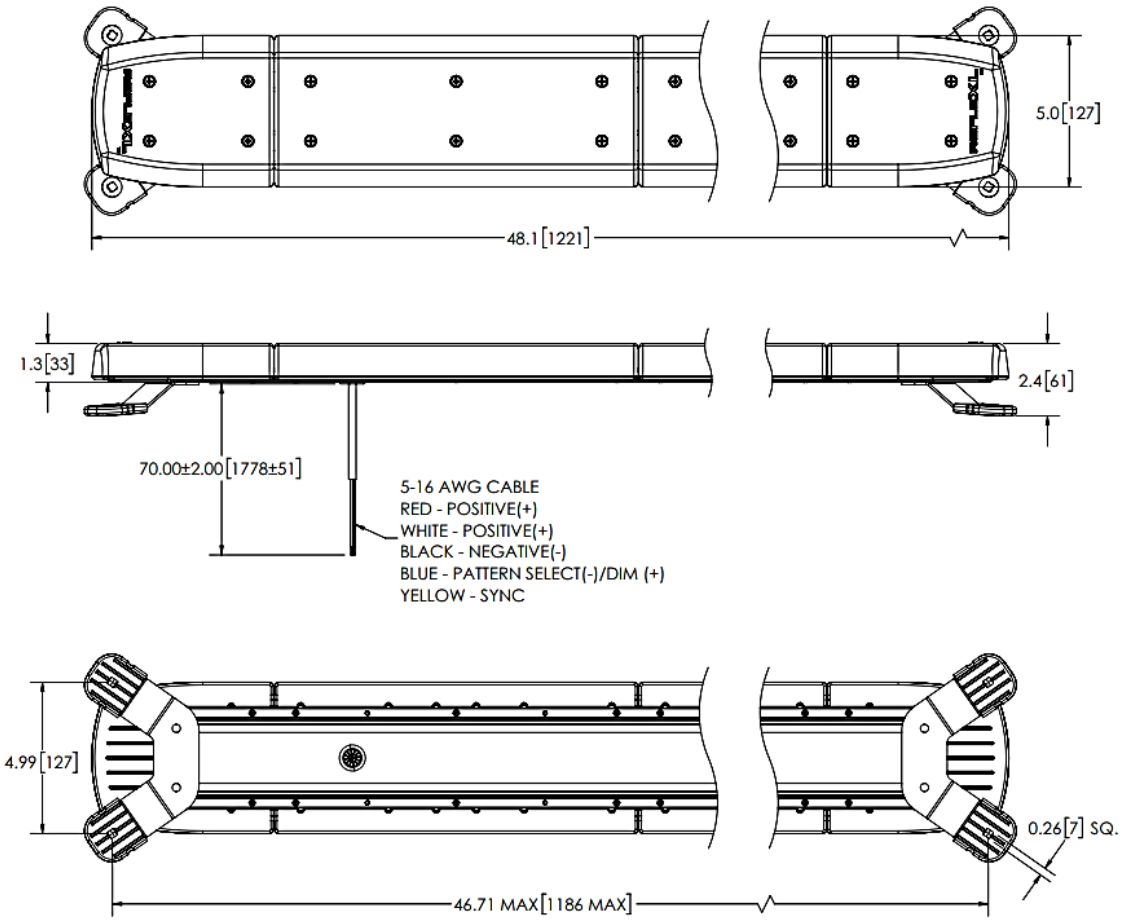

Unidad: pulgadas (mm)

SPECIFICATIONS

1. CERTIFICATIONS: CE; UKCA; ECE R10; AMECA/SAE J845 (FEB 2019) CLASS 1A; YELLOW, WHITE; CA Title 13 CLASS E, AMBER; ; Reg 65 CertE6 TA1 000429; IP69K
   Note: Unique components, accessories, and hardware kits are not typically Included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
2. FLASH MODE: SINGLE : 75 ± 5 FLASHES PER MINUTE
   SINGLE : 120 ± 5 FLASHES PER MINUTE
   DOUBLE : 75 ± 5 FLASHES PER MINUTE
3. VOLTAGE (NOMINAL): 12-24 VDC
4. VOLTAGE (EXTREME): 9.0-32 VDC
5. CURRENT (PEAK): 7.72A (@ 12 VDC NOMINAL)
6. POWER (MAXIMUM): 98.8W (@ 12 VDC NOMINAL)
7. TEMPERATURE RANGE: -40°F (-40°C) TO 185°F (85°C)
8. CONNECTION: 5 - 16 AWG CONDUCTOR CABLE
9. MOUNTING: 4 BOLT THROUGH MOUNTING KIT
10. BASE MATERIAL: ALUMINUM
11. LENS MATERIAL: POLYCARBONATE
12. PRODUCT WEIGHT: 7.75 LBS (3.49 Kg)