# INFORMACIÓN TÉCNICA

# 11060CACE

5 años de garantía




Serie 11 RefleXL es la barra de luces de advertencia más compacta de ECOO. Lente de policarbonato y marco de aluminio; torreta de 60” dual color ámbar- blanco. Recomendado para grúas, camiones de trabajo o vehículos utilitarios donde la advertencia compacta sea esencial.

## Especificaciones Técnicas

| | |
|---|---|
| **Voltaje:** | 12-24 VCD |
| **Amps:** | 7.73 |
| **IP:** | 69K |
| **Leds:** | 288 Leds |
| **Patrones:** | 91 Patrones de flasheo |
| **Color:** | LED (ámbar-blanco) – Mica (Clara) |
| **Temperatura:** | -40°C / + 65°C |
| **Certificaciones:** | SAE CLASS I, CA<br>T13, CE, UKCA, R10, CISPR25, ROHS |

# INFORMACIÓN TÉCNICA

# 11060CACE

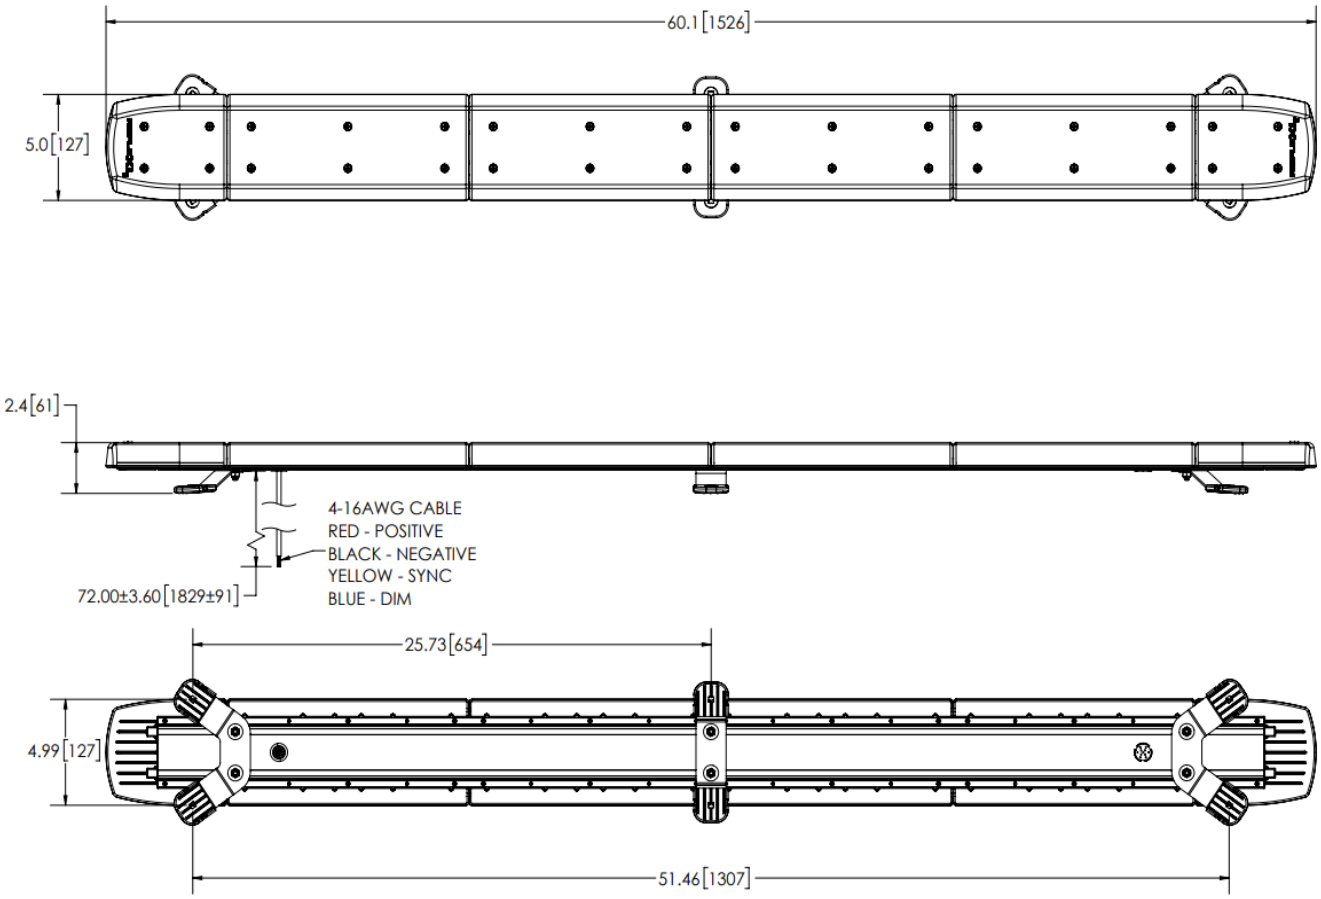


Unidad: pulgadas (mm)

## SPECIFICATIONS

1. CERTIFICATIONS: CE; ECE R10; SAE J845 (FEB 2019) CLASS 1A; YELLOW CA Title 13 CLASS E, AMBER; IP69K
   Note: Unique components, accessories, and hardware kits are not typically included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
2. FLASH MODE: SINGLE : 75 ± 5 FLASHES PER MINUTE
   SINGLE : 120 ± 5 FLASHES PER MINUTE
   DOUBLE : 75 ± 5 FLASHES PER MINUTE
3. VOLTAGE (NOMINAL): 12 - 24 VDC
4. VOLTAGE (EXTREME): 9.0-32.0 VDC
5. CURRENT (PEAK): 7.73A (@ 12 VDC NOMINAL)
6. POWER (MAXIMUM): 98.9W (@ 12 VDC NOMINAL)
7. TEMPERATURE RANGE: -40°F (-40°C) TO 158°F (70°C)
8. CONNECTION: 5 - 16 AWG CONDUCTOR CABLE
9. MOUNTING: 6 BOLT MOUNT KIT
10. BASE MATERIAL: ALUMINUM
11. LENS MATERIAL: POLYCARBONATE, CLEAR
12. PRODUCT WEIGHT: 12.85 LBS (5.82 Kg)