INFORMACIÓN TÉCNICA

11060TOWE


5 años de garantía



Serie 11 RefleXL es la barra de luces de advertencia más compacta de ECOO. Lente de policarbonato y marco de aluminio; torreta de 60” color ámbar, tiene direccional, stop, luz de trabajo y callejoneras. Recomendado para grúas, camiones de trabajo o vehículos utilitarios donde la advertencia compacta sea esencial.

Especificaciones Técnicas

Voltaje:	12-24 VCD
Amps:	7.73
IP:	69K
Leds:	264 Leds
Patrones:	35 Patrones de flasheo
Color:	LED (ámbar) – Mica (Clara)
Temperatura:	-40°C / + 65°C
Certificaciones:	SAE CLASS I, CA T13, CE, UKCA, R10, CISPR25, ROHS

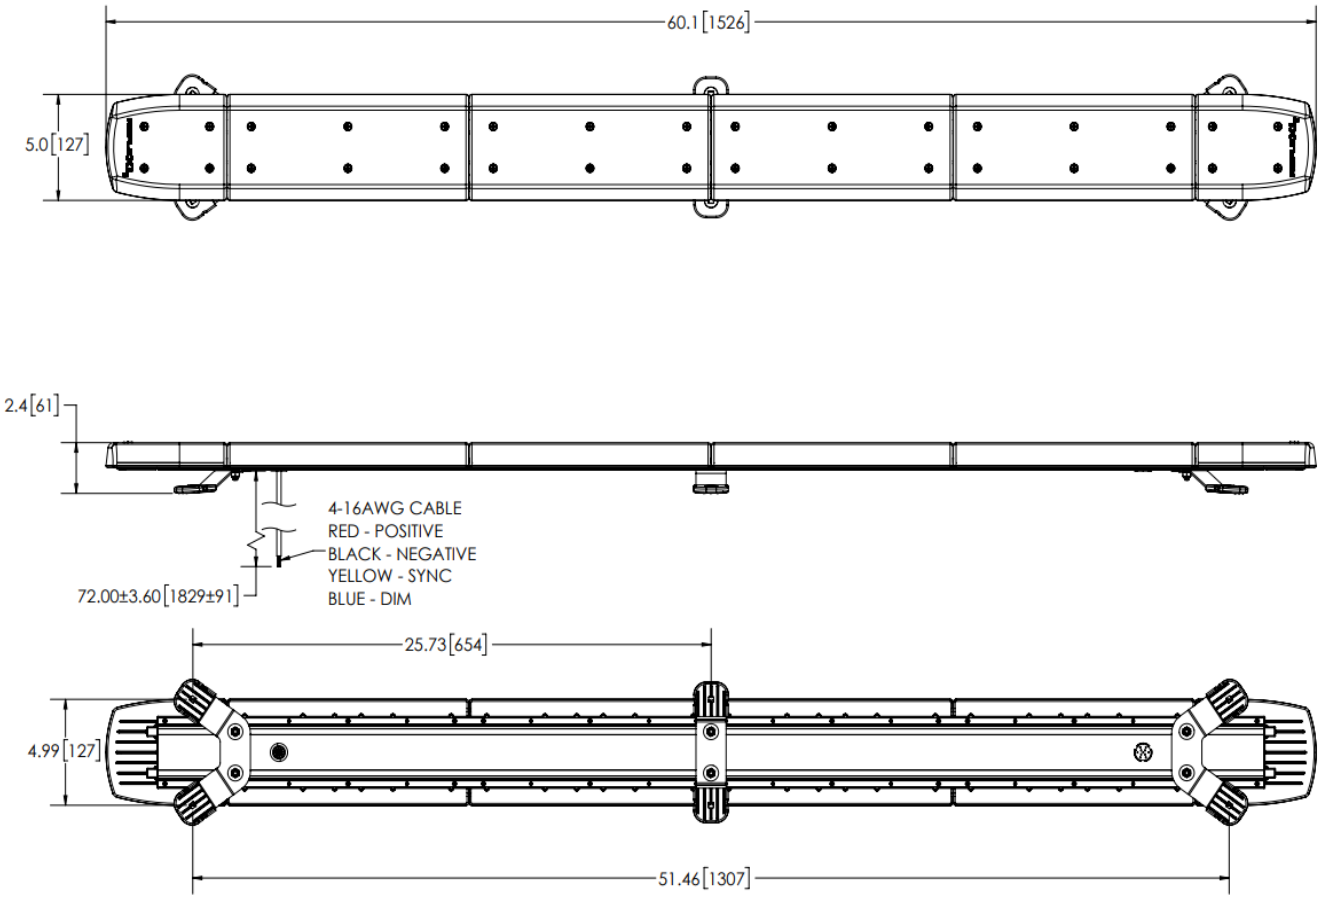

Unidad: pulgadas (mm)

SPECIFICATIONS

1. CERTIFICATIONS: CE; ECE R10; SAE J845 (FEB 2019) CLASS 1A; YELLOW CA Title 13 CLASS E, AMBER; IP69K
   Note: Unique components, accessories, and hardware kits are not typically included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
2. FLASH MODE: SINGLE : 75 ± 5 FLASHES PER MINUTE
   SINGLE : 120 ± 5 FLASHES PER MINUTE
   DOUBLE : 75 ± 5 FLASHES PER MINUTE
3. VOLTAGE (NOMINAL): 12 - 24 VDC
4. VOLTAGE (EXTREME): 9.0-32.0 VDC
5. CURRENT (PEAK): 7.73A (@ 12 VDC NOMINAL)
6. POWER (MAXIMUM): 98.9W (@ 12 VDC NOMINAL)
7. TEMPERATURE RANGE: -40°F (-40°C) TO 158°F (70°C)
8. CONNECTION: 5 - 16 AWG CONDUCTOR CABLE
9. MOUNTING: 6 BOLT MOUNT KIT
10. BASE MATERIAL: ALUMINUM
11. LENS MATERIAL: POLYCARBONATE, CLEAR
12. PRODUCT WEIGHT: 12.85 LBS (5.82 Kg)