
INFORMACIÓN TÉCNICA

5550CA

5 años de garantía

La micro barra Reflex de 11” utiliza LED de alta intensidad para maximizar la salida de luz. Base de policarbonato y lente de perfil bajo. Uso recomendable para señalización de advertencia en camiones, tracto camiones, grúas, entre otros.



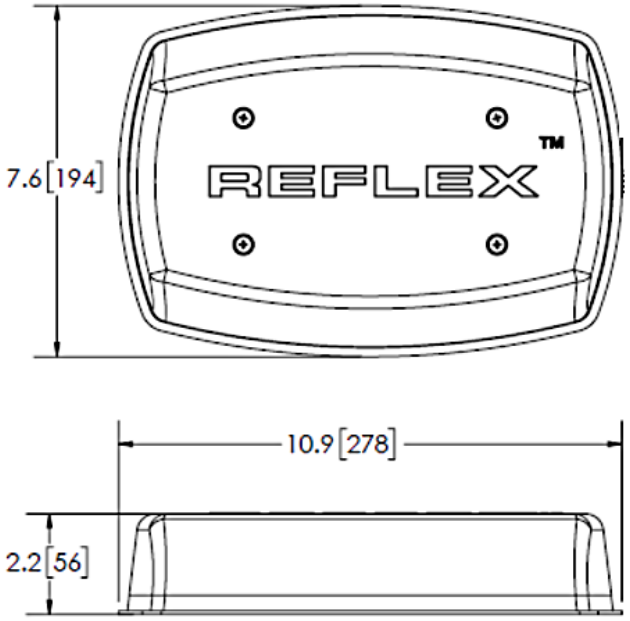


Unidad: pulgadas (mm)

Especificaciones Técnicas

Voltaje:	12-24 VCD
IP:	65
Amps:	3.4
Leds:	4 módulos (12 Leds c/u)
Color:	Ámbar
Patrones:	35 patrones de flasheo
Temperatura:	-30°C / + 50°C
Certificaciones:	SAE CLASS I, CA T13, R10, RCM, R65, ROHS

INFORMACIÓN TÉCNICA

5550CA

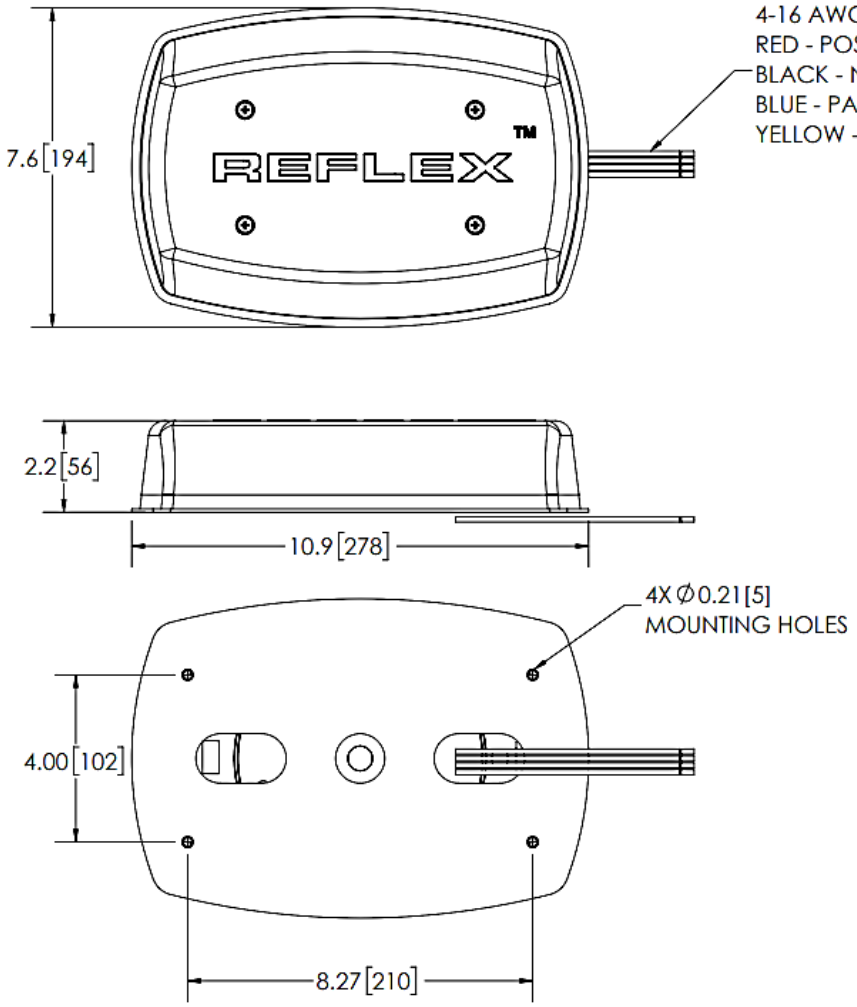

SPECIFICATIONS

1. CERTIFICATIONS: ECE R10; AMECA/SAE J845 (JUN 2013) CLASS 1A; YELLOW; CA Title 13 CLASS E; C-Tick ; Reg 65 CertE4-TA1-006639; IP6K5
   Note: Unique components, accessories, and hardware kits are not typically Included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
2. FLASH MODE: QUAD : 75 ± 5 FLASHES PER MINUTE
   DOUBLE : 75 ± 5 FLASHES PER MINUTE
   DOUBLE : 120 ± 5 FLASHES PER MINUTE
3. VOLTAGE (NOMINAL): 12 to 24 VDC
4. VOLTAGE (EXTREME): 9.0 to 32.0 VDC
5. CURRENT (PEAK): 3.42A (@ 12 VDC NOMINAL)
6. POWER (MAXIMUM): 43.8W (@ 12 VDC NOMINAL)
7. TEMPERATURE RANGE: -22°F (-30°C) TO 122°F (50°C)
8. CONNECTION: 4-16 AWG WIRES
9. MOUNTING: 4 BOLT MOUNT KIT
10. BASE MATERIAL: POLYCARBONATE
11. LENS MATERIAL: POLYCARBONATE
12. PRODUCT WEIGHT: 2.0 LBS (0.9 Kg)

Unidad: pulgadas (mm)