
INFORMACIÓN TÉCNICA

5550CAC

5 años de garantía

La micro barra Reflex de 11” utiliza LED de alta intensidad para maximizar la salida de luz. Base de policarbonato y lente de perfil bajo. Uso recomendable para señalización de advertencia en camiones, tracto camiones, grúas, entre otros.



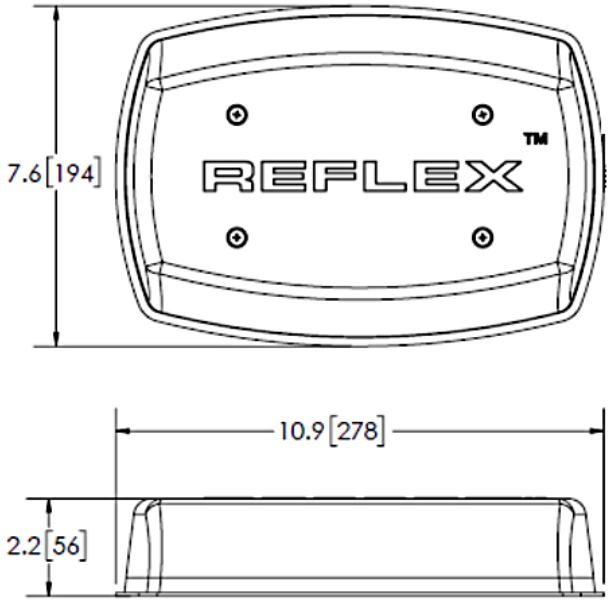


Unidad: pulgadas (mm)

Especificaciones Técnicas

Voltaje:	12-24 VCD
IP:	65
Amps:	3.4
Leds:	4 módulos (12 Leds c/u)
Color:	Ámbar-Blanco
Patrones:	91 patrones de flasheo
Temperatura:	-30°C / + 50°C
Certificaciones:	SAE CLASS I, CA T13, R10, RCM, R65, ROHS

INFORMACIÓN TÉCNICA

5550CAC

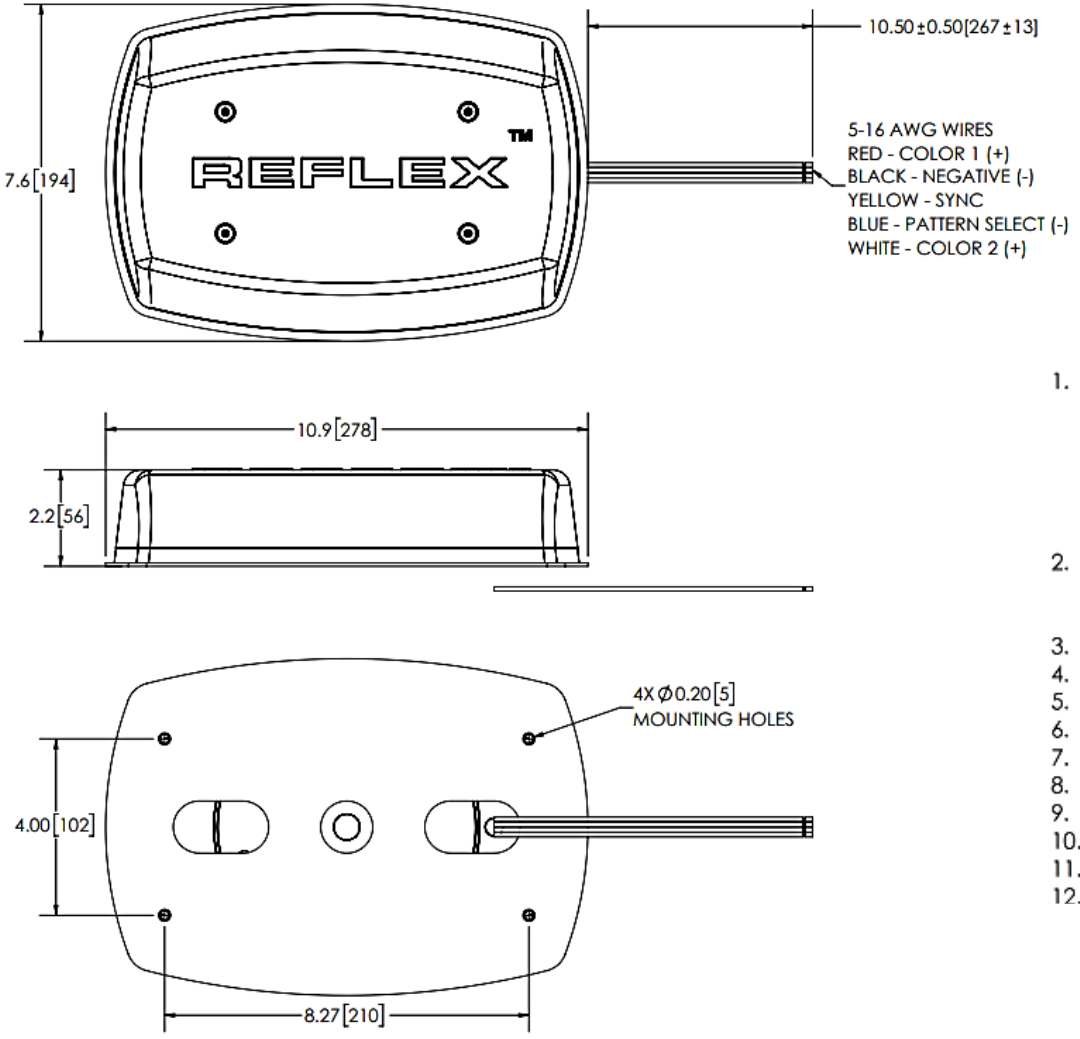

SPECIFICATIONS

1. CERTIFICATIONS: ECE R10; SEE CHART; ; Reg 65 CertE4 TA1-006655, TB1-006656; IP6K5
   Note: Unique components, accessories, and hardware kits are not typically Included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
2. FLASH MODE: QUAD (75) : 75 ± 5 FLASHES PER MINUTE
   DOUBLE (75) : 75 ± 5 FLASHES PER MINUTE
   DOUBLE (120) : 120 ± 5 FLASHES PER MINUTE
3. VOLTAGE (NOMINAL): 12-24 VDC
4. VOLTAGE (EXTREME): 9-32 VDC
5. CURRENT (PEAK): SEE CHART (@ 12 VDC NOMINAL)
6. POWER (MAXIMUM): SEE CHART (@ 12 VDC NOMINAL)
7. TEMPERATURE RANGE: -22°F (-30°C) TO 122°F (50°C)
8. CONNECTION: 5-16 AWG WIRES
9. MOUNTING: 4 BOLT MOUNT KIT
10. BASE MATERIAL: POLYCARBONATE
11. LENS MATERIAL: POLYCARBONATE
12. PRODUCT WEIGHT: 2.0 LBS (0.9 Kg)

Unidad: pulgadas (mm)